


265 Sto Gold Coat
ICC Code Recognition

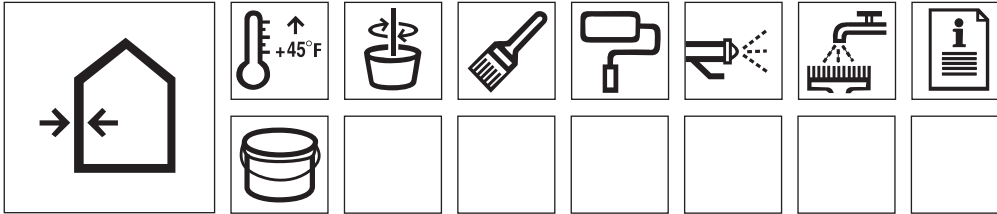

Technical Data

StoGuard™ Assembly with Sto Gold Fill® and Sto Gold Coat®

TEST	METHOD	CRITERIA	RESULTS
Aging/Water Penetration Resistance	AATCC 127 (Water Column)	Resist 21.6 in (55 cm) water for 5 hours before and after aging	No water penetration before and after aging. No water penetration at 332 inches (845 cm) head of water before aging
Structural Loading/Water Penetration Testing	ASTM E-1233/ ASTM E-331	No water at exterior plane of sheathing (exterior gypsum, Dens-Glass® Gold, plywood, OSB) after 10 cycles @ 80% design load and 75 minutes water spray at 6.24 psf (299 Pa) pressure differential with water spray rate of 5 gal/ft ² -hr (3.4 L/m ² -min)	No water penetration
Cyclic Pressure/Water Penetration Testing	ASTM E-283/ ASTM E-331	No water penetration or evidence of elevated moisture levels in plywood sheathing after 10 cycles of conditioning at 299 Pa (6.24 psf) positive and negative pressure followed by 75 minutes water spray at 6.24 psf (299 Pa) pressure differential with water spray rate of 5 gal/ft ² -hr (3.4 L/m ² -min)	No water penetration, no elevated moisture levels
Water Resistance Testing: Sto Gold Coat	ASTM D-2247	Absence of deleterious effects after 14 day exposure	No deleterious effects after 14 day exposure
Resistance to Mold Growth: Sto Gold Coat	ASTM D-3273	No mold growth after 28 days	No mold growth after 28 day exposure
Freeze/Thaw Resistance	ICBO Method (AC 24)	No visible effects (cracking, checking, delamination, erosion) when viewed at 5x	No visible deleterious effects at 5x magnification
Water Vapor Transmission: Sto Gold Coat	ASTM E-96 Method B (Water Method)	Measure	5.7 perms at 5-7 DFT [327 ng/(Pa-s-m ²)]
Air Leakage: Wall Assembly w/Sto Gold Fill & Sto Gold Coat	ASTM E-283 (SBCCI PST & ESI Method)	< 0.06 cfm/ft ² @ 1.57 psf [0.00030 1/(s-m ²) @ 75 Pa]	0.0044 cfm/ft ² [0.000022 1/(s-m ²)]
Structural Integrity	ASTM E-330	2 inches (51 mm) water pressure (positive and negative) for 1 hour	No loss of structural integrity
Nail Sealability	ASTM D-1970		Pass
Flexibility	ASTM D-522	No cracking or delamination using 1/8" (3 mm) mandrel at 14°F (-10°C) before and after aging	No cracking or delamination before and after aging
Tensile Adhesion	ASTM C-297	> 15 psi (103 kPa)	Gypsum (ASTM C 79): > 30 psi (206 kPa) Gypsum (ASTM C 1177): > 30 psi (206 kPa) Exposure 1 OSB: > 50 psi (344 kPa) Exterior Plywood: > 90 psi (620 kPa)
Surface Burning	ASTM E-84	Flame Spread: < 25 Smoke Developed: < 450	Flame Spread: 5 Smoke Developed: 10 NFPA Class A, UBC Class 1 building material
Fire Testing	UBC 26-9	No increase in fire hazard	Pass
VOC (g/L)	Calculated		23 (28*)
Percent Solids			60%

*Less Water and Exempt Solvents

Notes: 1. IBC: International Building Code. 2. NFPA: National Fire Protection Association.

Sto Gold Coat is a ready-mixed flexible waterproofing material. It is applied directly to vertical above grade wall sheathing and concrete masonry, and functions as a waterproofing/air barrier when combined with StoGuard joint and rough opening treatment.

Sto Gold Coat is specially formulated for use with StoTherm™ Insulated Wall Claddings (EIFS).

Sto Gold Coat is one component of the StoGuard Assembly, which is a liquid applied building wrap that offers a superior waterproofing/air barrier. StoGuard can be used beneath various claddings including brick, wood, vinyl, or fiber/cement sidings, and as part of StoTherm™ NExt.

Coverage

Dens-Glass Gold: 425-525 ft² (39-49 m²) per pail.
Exterior Gypsum: 550-650 ft² (51-60 m²) per pail.
Plywood: 550-650 ft² (51-60 m²) per pail.
OSB: (2 coats): 350-450 ft² (33-42 m²) per pail.
CMU: (2 coats): 100-300 ft² (9.3-28 m²) per pail.

Coverages may vary depending on application technique and surface conditions.

When used with StoGuard Fabric to treat the sheathing joints and rough openings:

Dens-Glass Gold: 400-500 ft² (37-46 m²) per pail.
Exterior Gypsum: 500-600 ft² (46-56 m²) per pail.
Plywood: 400-500 ft² (37-46 m²) per pail.
OSB: 300-400 ft² (33-42 m²) per pail.
CMU: (2 coats) 100-300 ft² (9.3-28 m²) per pail.

Coverages may vary depending on the number of rough openings as well as surface conditions.

Packaging

5 gallon (19L).

Shelf Life

12 months, if properly stored and sealed.

Storage

Protect from extreme heat [90°F (32°C)], freezing and direct sunlight.



265 Sto Gold Coat®

Features	Benefits
1 Waterproof coating for sheathing	Minimizes risk of water damage to sheathing and associated repair or replacement costs
2 Vapor Permeable	Moisture does not get trapped in the wall cavity
3 Structural	No air moisture intrusion between the sheathing and StoGuard; rigid and stable under air pressure loads; does not tear or blow off the wall with wind
4 Seamless	No tears, holes, or mislapped joints that can compromise performance in service
5 Durable	Does not tear or lose its effectiveness with exposure to weather during construction or while in service
6 Spray applied via airless spray equipment	Easy, fast installation; does not require specialized spray equipment
7 Resists UV Degradation	Gives peace of mind if construction delays occur
8 Liquid Formulation - Water Based	Safe non-toxic, VOC compliant, saves time and money when installing the product, does not require highly skilled labor

Surface Preparation

Surfaces must be clean, dry, and free of frost, damage and all bond-inhibiting materials, including dirt, efflorescence, form oil and other foreign matter. Damaged sheathing must be removed and replaced. Avoid application over irregular surfaces. Substrate to be coated must

be continuous without joints, holes, etc. exceeding 1/32" (0.8 mm) in size. Sheathing must be properly installed as required by applicable building codes or sheathing manufacturer.

Mixing

Mix with a clean, rust-free electric drill and paddle to a uniform consistency.

PRODUCT MUST NOT BE THINNED OR DILUTED.

Application

Apply only to sound and clean, dry, properly prepared, frost-free surfaces. Sheathing joints, inside and outside corners and rough openings must be treated with StoGuard joint and rough opening treatment. Spot fasteners, knots or other voids in sheathing surface with Sto Gold Fill.

Over Exterior Gypsum Sheathing, Dens-Glass Gold, Exterior Plywood: Apply Sto Gold Coat to the prepared substrate using spray equipment such as Sto's M-8 Spray Pump, or Graco airless spray equipment, 595 with a 25 mil tip or, 695 with a 27 mil tip, or with the appropriate size nap roller in a single, uniform coating at a wet thickness of 10 mils. Application over G-P Dens-Glass Gold sheathing: use 3/4" (19 mm) nap roller. Application over plywood and exterior gypsum sheathing: use a 1/2" (13 mm) nap roller.

Over Oriented Strand Board (OSB): A two-coat application of Sto Gold Coat is required over OSB. The first coat is applied over the prepared substrate prior to treating sheathing joints, rough openings, and corners. Apply Sto Gold Coat by spray or roller with a 3/4" (19 mm) nap roller in a single, uniform coating at a wet thickness of 10 mils and allow to dry. For air barrier, sheathing joints, rough openings, and corners must then be covered with StoGuard joint treatment. Substrate to receive the second coat of Sto Gold Coat must be continuous without joints, holes, etc. exceeding 1/32" (0.8 mm) in size. The second coat of Sto Gold Coat must be applied over the treated surface in a single, uniform coating to a wet thickness of 10 mils.

Over Concrete Masonry Wall Construction: Concrete masonry wall construction must be structurally sound, clean, dry, and free from damage, frost, and all bond-inhibiting material, including dust, dirt, mold, algae, and efflorescence. Repair cracks up to 1/8 inch (3 mm) wide by filling with Sto Gold Fill. Rake the crack with a sharp tool to remove loose or friable material, and blow clean with oil-free compressed air. Apply Sto Gold Fill by spray, trowel or putty knife over the crack and smooth with the knife or trowel. For cracks wider than 1/8 inch (3 mm) and up to 1/4 inch (6 mm) wide, use a paintable acrylic latex caulk to fill the crack, tool flush with the surface, and allow to dry completely. For moving cracks consult a structural engineer. Do not use Sto Gold Fill to repair moving cracks or cracks wider than 1/8 inch (3 mm). Protect crack repair materials from rain and freezing until dry.

For Air and Moisture Barrier: Spray-applied over CMU. Apply Sto Gold Coat uniformly with the Sto M-8

pump, airless spray, or other suitable spray equipment. Backroll to fill the surface and allow to dry. Apply a second uniform coat of Sto Gold Coat and backroll to achieve a void and pinhole free surface. Depending on the condition of the surface a minimum of 10 wet mils up to a maximum of 30 wet mils per coat is required. Apply additional coats if needed to achieve a VOID AND PINHOLE FREE surface.

Roller-applied over CMU: Apply Sto Gold Coat uniformly with a 3/4 inch (19 mm) nap roller and allow to dry. Apply a second uniform coat of Sto Gold Coat to achieve a void and pinhole free surface. Depending on the condition of the surface a minimum of 10 wet mils up to a maximum of 30 wet mils per coat is required. Apply additional coats if needed to achieve a VOID AND PINHOLE FREE surface.

IMPORTANT NOTE: Sto Gold Coat functions as a waterproofing/air barrier on normal weight concrete masonry unit wall construction with flush (struck flush with the surface of the CMU) or concave joints when a minimum of two liberal coats are applied. Additional coats may be necessary depending on the condition of the CMU wall surface, CMU porosity, joint profile, and other variables that may exist. For "rough" CMU wall surfaces, skim coat the entire surface with one of Sto's cementitious levelers (Sto Leveler, Sto BTS-Plus, Sto BTS-Silo, or Sto Primer-Adhesive-B) before application of Sto Gold Coat. A VOID AND PINHOLE FREE SURFACE must be achieved for Sto Gold Coat to properly function as a waterproofing/air barrier on CMU wall surfaces.

Material Storage

Keep containers covered to protect from skinning. If skin forms, remove the skinned material from container; remaining material is unaffected by skinned material.

Curing/Drying

Sto Gold Coat is dry to touch and can be overcoated within 2-4 hours under normal conditions (70°F [21°C], 50% RH). Wait 24 hours before adhesive attachment of Sto insulation board.

Final drying varies depending on temperature/humidity and surface conditions.

Protect from rain and freezing until completely dry.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Health And Safety

Health Precautions

Products are water-based. As with any chemical construction product, exercise care when handling.

Safety Precautions

Use adequate ventilation. Safety goggles and protective gloves are recommended. Remove contaminated clothing immediately.

First Aid

SKIN CONTACT: Wash thoroughly with soap and water.

EYE CONTACT: Flush immediately with water for 10-15 minutes and contact a physician.

RESPIRATORY PROBLEMS: Remove affected person to fresh air immediately and contact a physician. HYGIENE: Wash hands immediately after use. Wash clothing before re-use.

Spills: Collect with a suitable absorbent material such as cotton rags.

Disposal: Dispose in accordance with local, state and federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Material Safety Data Sheet for further health and safety information.

Limitations

- Apply only when the surface and ambient temperatures are above 40°F (4°C) and below 100°F (38°C) during application and drying period.
- Not recommended for use when cool, damp conditions exist for prolonged periods. Cool, damp conditions retard drying and may require extended periods of protection.
- Do not use on damp surfaces, below grade, or on surfaces subject to water immersion.
- Fire-retardant treated or pressure treated plywood substrates must be dry and free of all bond-inhibiting materials.
- Not recommended for spanning sheathing joints or holes in excess of 1/8" (3 mm) wide.

For complete information refer to Sto Guard Air Barrier and Moisture Control Handbook.

LIMITED WARRANTY

THIS PRODUCT IS SUBJECT TO A WRITTEN LIMITED WARRANTY WHICH CAN BE OBTAINED FREE OF CHARGE FROM: Sto Corp., 3800 Camp Creek Parkway, Building 1400, Suite 120, Atlanta, GA 30331; Tel: 404-346-3666 Fax: 404-346-3119.

ATTENTION

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

Sto Corp.
3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331
Tel: 404-346-3666
Toll Free: 1-800-221-2397
Fax: 404-346-3119
www.stocorp.com



S155-265 06/07 VEN 5609

sto